SPRING-LOADED SHOCK ABSORBING CASTORS



During transport over uneven surfaces the spring supports the load, absorbing the impact instead of transferring it all to the item being transported.

S5088 REVERSE VIEW


Wheel Wheel Wheel Bearing Load Height Swivel Rigid Swivel Diameter Width Capacity Radius Code Code Туре Туре (mm) (mm) (mm) 200/100 R4089 100 50 Poly Ci **Ball Bearing** 180 105 S4088 200/100 R5089 125 50 Poly Ci Ball Bearing 194 119 S5088 Poly Ci 200/100 205 130 R6089 S6088 150 50 **Ball Bearing** Poly Ci 200/100 R8099 200 50 Ball Bearing 256 181 S8089

BRAKE OPTIONS:

CHMOND

B = Brake To order castors with Brake add B to end of swivel code e.g. S6088B

S5088

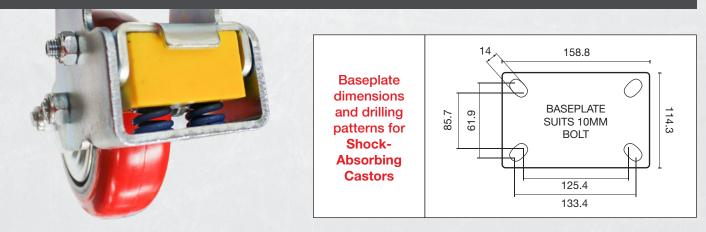

FOR MORE INFORMATION CONTACT OUR STAFF

1300 474 246 sales@richmondau.com www.richmondau.com

UP TO

200KG